

# Table of Contents

<b>Scenarios</b> .....	3
Syntax, commands and examples .....	3
Dependencies .....	4



# Scenarios

Scenarios are used to interact with the network and performs specific configuration updates.

Every job has an underlying scenario that is defined by the operational web-tool that initiates it. The web-tool creates the job using task(s) referencing the scenarios defined here along with the parameters that the specified scenario uses. Common parameters are <node> and <verbose>, but basically any number and names are allowed, provided the job and the scenario(s) use the same set.

Scenarios can be concatenated to allow common operations to be reused. Therefore, it is good practice NOT to include an 'end' statement at the end of a scenario. Otherwise concatenating scenarios would not perform the desired actions, as the "end" statement terminates the scenario.

The scenarios and its functions are not case sensitive. Indentation is desirable but not mandatory.

## Scenarios

Scenario	Description	Notes
interface_find_free	find free interfaces	
intf_vlan_range	config parsing interface vlan	
junos_test		
L3vpn_test_push	L3vpn config create, validate and deploy	
Link_degrade_test		
Load_command_file	Load command file	#----- Load command file ----- # # Sample [Param...]
Node-migration	Generic Node-migration	#----- Generic Node-migration ----- # # Sample [Pa...
OS_activate	OS activate scenario for OS upgrades	

[New](#) [Duplicate](#) [Delete](#) [Import](#) [Export](#)

## Syntax, commands and examples

- The syntax for the commando scenarios is described in [scenario syntax](#).
- The commands/functions that can be used within are described in [scenario commands](#).
- Some examples are available in [scenario example](#).


Additionally, when editing a scenario, a contest sensitive help is permanently displayed to assist the user in selecting the commands and its various options.

Name	interface_find_free	Description	find free interfaces												
<b>Text</b>															
<pre> 1 <b>Description</b> checking duplex mismatch on &lt;node&gt; 2 3 # Test whether node is live and reachable 4 <b>reachable</b> -n &lt;node&gt; 5 6 if &lt;error&gt; 7   Log_action -n &lt;node&gt; -a Command_job -m "&lt;node&gt; is not Reachable" 8   stop 9 endif 10 11 if &lt;vendor_type&gt; == "Cisco_IOS" 12   Log_action -n &lt;node&gt; -a Free_interface -m "12 before parse" 13   &lt;tcmd&gt; = parse_cmd -n &lt;node&gt; -t interface_description_2 -r "show interface description   include admin" 14   Log_action -n &lt;node&gt; -a Free_interface -m "14 after parse" 15   &lt;Interfaces&gt; = keys &lt;tcmd&gt; 16   Log_action -n &lt;node&gt; -a Free_interface -m "16 Interfaces is key" 17   foreach &lt;Interface&gt; in &lt;Interfaces&gt; </pre>															
<table border="1"> <tr> <td>Command</td> <td>reachable</td> <td>reachable</td> <td>reachable</td> </tr> <tr> <td>Help</td> <td>test if node is reachable using ssh or telnet</td> <td></td> <td></td> </tr> <tr> <td>Options</td> <td> -n &lt;node&gt;: the node in question  [-a &lt;address&gt;]: overrides the address of the node  [-p &lt;port_list&gt;]: override the default ports 22 and 23  [-t &lt;timeout&gt;]: timeout in seconds </td> <td></td> <td></td> </tr> </table>				Command	reachable	reachable	reachable	Help	test if node is reachable using ssh or telnet			Options	-n <node>: the node in question [-a <address>]: overrides the address of the node [-p <port_list>]: override the default ports 22 and 23 [-t <timeout>]: timeout in seconds		
Command	reachable	reachable	reachable												
Help	test if node is reachable using ssh or telnet														
Options	-n <node>: the node in question [-a <address>]: overrides the address of the node [-p <port_list>]: override the default ports 22 and 23 [-t <timeout>]: timeout in seconds														

## Dependencies

Scenarios can be used in Templates, Scenarios and Stored jobs. To prevent deleting a Scenario that is in use in any of these applications, a dependency check is performed when attempting to delete a Scenario.

The results of the dependency check is a detailed report on which templates, scenarios and jobs include a reference to the Scenario and on which line number. The line with the reference is incorporated.

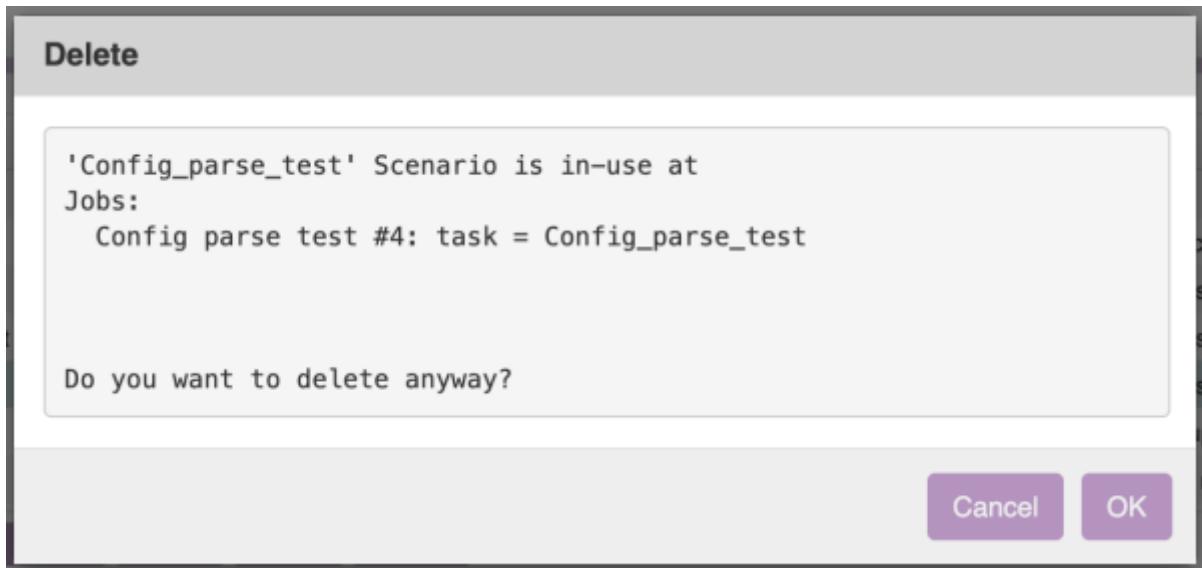

Depending on user permission level, the dependencies that prevent deletion can be overridden. If permitted, the dependencies report concluded with the message "Do you want to delete anyway?" and offers the choices 'Cancel' and 'Ok'.

The permissions are defined in the YCE.Auth\_permissions table and can be changed using the 'delete\_override' actions for 'relations', 'templates', 'template\_revisions' and 'scenarios'. The default is that only 'Manager' and 'System' level users have the override permissions (Role\_5 and Role\_6 columns).

From:  
<https://labs-wiki.netycce.com/> - **Technical documentation**



Permanent link:  
<https://labs-wiki.netycce.com/doku.php/menu:operate:scenarios:scenarios>

Last update: **2022/04/29 12:23**